

Low Bay Ruggedized Micro Sensor



SU-5E-LR

SPECIFICATION

The Enlighted Low Bay Ruggedized Micro Sensor is our fifth-generation sensor, delivering all the functionality of our other sensors in a minimally-sized package. It is designed for outdoor applications, parking structures, and damp or wet locations that require a sensor with an IP65 rating. Integrated sensors capture data that is both processed locally and transmitted over the Enlighted network, enabling a full suite of applications. In addition, the sensor supports Bluetooth® Low Energy communication with tags and other BLE devices.



OVERVIEW

The Enlighted Low Bay Ruggedized Micro Sensor is a complete sensing and lighting control node powered from its attached light fixture. With integrated wireless communications for data transmission and remote configuration as well as autonomous fixture-level control, this sensor brings advanced lighting automation to a whole new level.

FEATURES AND BENEFITS

Approvals: Plenum rated and UL 2403 recognized.

Manage: Compatible with Manage version 4.5 or higher.

Enlighted Sensor Interface (ESI): IoT Ready™ LED drivers and Enlighted Control Units communicate with the sensor directly via a serial interface. The ESI provides access to device information, energy consumption, and digital lighting control.

Localized Lighting Control: Light-level schedules, preferences, and behavior profiles for each fixture are wirelessly communicated during system setup and locally stored to ensure continuous operation.

Edge Sensing: Local processing capability supports advanced sensing and detection algorithms, providing optimization of existing features and enabling future applications.

Bluetooth Low Energy: An embedded BLE radio allows the sensor to receive and transmit beacons as well as support communication with lighting control devices and other sensors.

Occupancy and Thermal Sensing: A digital Passive Infrared (PIR) sensor combined with separate ambient and temperature sensing support precise motion identification while minimizing false detection events.

Tunable White: Dual channel control supports tunable white fixtures, enabling color transitions based on time of day or user control.

Daylight Harvesting: Captured ambient light information is locally processed to raise and lower light levels based on available daylight.

Room and Zone Control: Pairs with room control switches for code-compliant manual-on or auto-off capability. Sensors can be grouped into zones that share occupancy sensing data and coordinate light control based on detected motion.

IoT Sensing Node: When configured as an IoT Node, the sensor streams comprehensive live data for use with Enlighted's real-time location and analytics software applications. This option is available directly from the factory or as a remote upgrade.

Standards-Based Networking and Security: The Enlighted 802.15.4 wireless network with AES-128 encryption delivers secure, reliable communication that coexists with Wi-Fi networks by sensing low-traffic channels and transmitting in bursts.

Data Privacy: The sensor captures occupancy data in the sensor coverage area. The sensor cannot directly reference or identify any natural person.

Driver Compatibility: Dimming and on/off control signaling for standard 0-10V ballasts and drivers using linear dimming curve for LED and fluorescent light fixtures.

Low Bay Ruggedized Micro Sensor

| | | | |
|-------|------|-------|-------|
| Body | L | 0.78" | 20 mm |
| | Dia. | 0.70" | 18 mm |
| Bezel | Dia. | 1.29" | 33 mm |

Each sensor comes with a black Bezel (shown above) and a white Bezel.

ENLIGHTED SPECIFICATION SUBMITTAL

| | |
|----------------|---|
| Job Name: | <input type="text"/> |
| Job Number: | <input type="text"/> |
| Product Codes: | <input type="checkbox"/> SU-5E-LR-[IoT/CL/IL] |
| | <input type="checkbox"/> SU-CL-IoT-UPG |
| | <input type="checkbox"/> SU-IL-IoT-UPG |
| | <input type="checkbox"/> CPL-RJ45 |
| | <input type="checkbox"/> CBL-5E-CU4-30N |
| | <input type="checkbox"/> CBL-5E-CU4-7F |
| | <input type="checkbox"/> CBL-5E-CU4-12N |
| | <input type="checkbox"/> CBL-5E-5W-30N |
| | <input type="checkbox"/> |
| | <input type="checkbox"/> |
| | <input type="checkbox"/> |
| | <input type="checkbox"/> |

Low Bay Ruggedized Micro Sensor

SU-5E-LR




MOUNTING

The Enlighted Low Bay Ruggedized Micro Sensor is designed to be easily mounted into lighting fixtures or standard 1/2" EMT threaded couplers and fittings such that only the discreet faceplate is visible. The sensor screws into an industry standard 1/2"-13 threaded mounting hole. Sensor replacement requires no tools—simply, unplug the connector, unscrew the sensor, and install the new sensor.

SENSOR COVERAGE PATTERNS


The Enlighted Low Bay Ruggedized Micro Sensor incorporates an optical Fresnel lens that works with the digital Passive Infrared (PIR) sensor to detect occupancy and motion. The multifaceted lens focuses light onto the PIR to produce an all-encompassing field of view through aggregation of many narrow fields of view. When the sensor is deployed as recommended, the area covered by each sensor overlaps, reinforcing coverage and accuracy across the entire floor plan.

Enlighted Low Bay Ruggedized Micro Sensor




| Ceiling Height | Minor Motion (Radius) | Major Motion (Radius) |
|----------------|-----------------------|-----------------------|
| 8.5 ft/2.6 m | 8 ft/2.4 m | 10 ft/3.0 m |
| 15 ft/4.6 m | 10 ft/3.0 m | 18 ft/5.5 m |

Top View

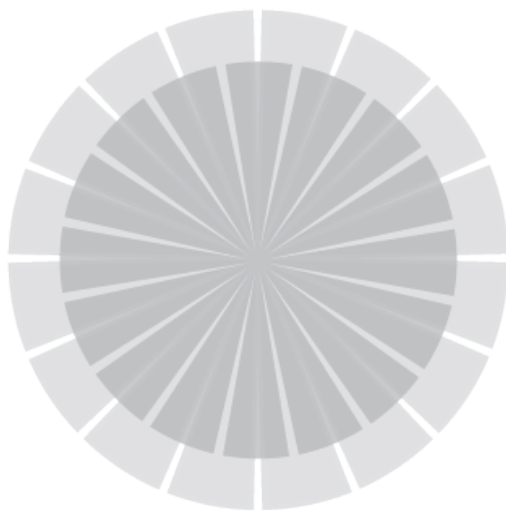

Side View

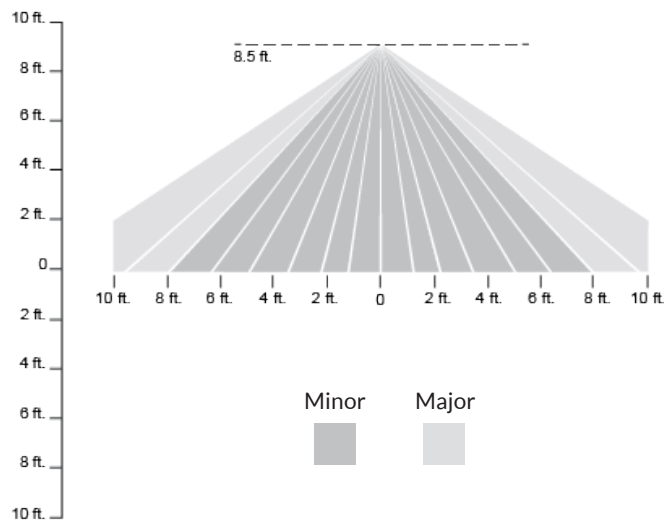

TECHNICAL SPECIFICATIONS

- Motion Sensing:** Digital Passive IR
- Photosensor:** Light Pipe/Photosensor Array
- Enclosure:** ABS/Polycarbonate blend
- Type:** Closed Loop Light Sensor
- Operating Temp:** -31° to 185° F / -35° to 85° C
- Operating Humidity:** 0 to 100% RH, non-condensing
- Power Consumption:** 200 mW max.
- Voltage:** 12-30 V
- Wireless Standards:** IEEE 802.15.4
- Bluetooth 4.0 Low Energy (BLE)
- Radio Frequency: 2400-2483.5 MHz
- Wireless Range: 150 ft. (46 m) radius open range
- Encryption: AES-128
- Two Dimming Outputs:** 10mA source/sink each

ORDERING INFORMATION

- SU-5E-LR-xxx* Enlighted Low Bay Ruggedized Micro Sensor (*see Product Codes)
- SU-CL-IoT-UPG Connected Lighting to IoT sensor Upgrade
- SU-IL-IoT-UPG Independent Lighting to IoT Sensor Upgrade
- CPL-RJ45 Female RJ45 Coupler
- CBL-5E-CU4-30N 30 inch Sensor Cable for CU-4
- CBL-5E-CU4-7F 7 foot Sensor Cable for CU-4
- CBL-5E-CU4-12N 12 inch Cable for CU-4
- CBL-5E-5W-30N 30 inch Profile O Driver Cable

COMPLIANCE

- UL Plenum Rated
- Europe
- United States
- Canada

WARRANTY: 5 years
View www.enlightedinc.com/limited-warranty-terms for complete terms and conditions

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Enlighted Inc. is under license. Other trademarks and trade names are those of their respective owners.

- * **Product codes:** xxx
- IoT = IoT Node
- CL = Connected Lighting
- IL = Independent Lighting/Enlighted One